


## Detailed description:

Morland doors are based on a severe duty chipboard core and third-party accreditation under the BWF Certifire Scheme.

Morland laminate faced doors have a finish that is intended for high traffic, severe contract use. Finished with Eggers' decorative surfaces and visually identical to our melamine faced heavy duty doors. They are ideal for singles and pairs. Lipped all four sides in 2 mm ABS for stability and durability.

## Features and benefits:

- Safety: Independently tested by Exova to BS476 Part 22 (1987) and third party accredited by the British Woodworking Federation under the BWF- Certifire Scheme.
- Compatibility: Doors complement other Egger surfaces.
- Morland doors and doorsets are supplied with FSC® MIX 70%.

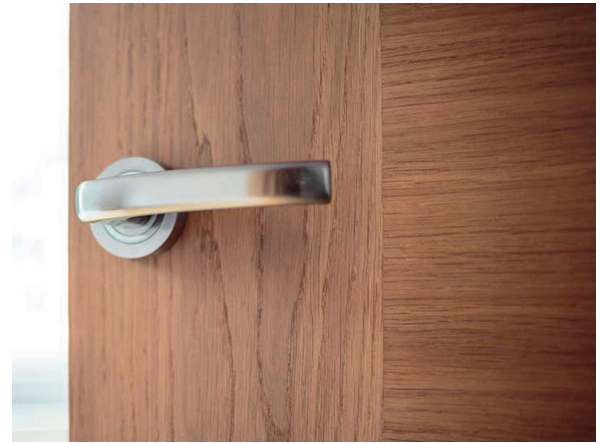

## Product specification:

**Product reference:** Morland Laminate Faced Severe Duty Door.

**Fire resistance:** None-fire rated  
FD30  
FD30s  
FD60  
FD60s

**Sound reduction:** 32 dB, 44mm thick solid door  
34 dB, 44mm thick vision panel door  
34 dB, 54mm thick solid door  
36 dB, 54mm thick vision panel door

### Colour/Finish:

- Door facing   
- Lipping To match door facing.  
Client specific- Consult manufacturer and insert requirement.

### Glazing:

- Aperture design Not required- For solid doors only.  
Large rectangle, 1500x195mm.  
Client specific- Consult manufacturer and insert requirement.

- Glass Not required- For solid doors only.  
7mm Pyrobelite- For FD30 fire rated doors only.  
7mm Pyroguard- For FD30 fire rated doors only.  
7mm Pyrostem Wired- For non-fire rated doors only.  
11.4mm Pyroguard- For FD60 fire rated doors only.  
12mm Pyrobelite- For FD60 fire rated doors only.

## As standard:

### Acoustic seals:

- All doors can be supplied with acoustic seals.

### Facings:

- Egger 0.8mm laminate faced decor.

### Lippings:

- 2mm ABS edging on all four sides.

### Fire resistance:

- Ratings are dependent on the door being hung in appropriate frame with appropriate intumescent seals.

### Sound reduction:

- Ratings are dependent on the door being hung in appropriate frame with appropriate acoustic seals. Doors have been tested by Sound Research Laboratories to BS 10140-2:2010.

### Core:

- Severe duty solid chipboard 560 kg/m<sup>3</sup>.
- Morland doors are tested to the new European Standards BS EN1192/DD171.

### Manufacturer:

- Name: Morland  
- Web: [www.morland-uk.com](http://www.morland-uk.com)  
- Email: [info@morland-uk.com](mailto:info@morland-uk.com)  
- Tel: +44 (0)1938 551980  
- Fax: +44 (0)1938 554174  
- Address: Morland, Unit 2, Buttington Cross Enterprise Park, Welshpool, Powys, SY21 8SL